







INSTALLATION GUIDE —————>

LIGHT-POINT

WE BELIEVE IN CREATING LIGHT

At LIGHT-POINT we have one goal - to improve the everyday **life** of people all over the world. Our lamps are designed to provide inspiration, and to solve everyday needs, be it lighting your home **interior**, your office or public spaces. Our **design** is not driven by current trends, since we believe that a classic, minimalistic design with the right function will last for generations and bring **character** into any **environment**.

FOCUS + Design: Ronni Gol



FOUNDER —————>

Ronni Gol had a decisive influence on how we experience the world around us and interact with one another. We are fortunate enough to live in a world, where we as consumers can choose to switch between night and day according to our whims. In short, we can construct the exact life suiting our individuality, because we are not dependent on daylight to be able to function, and can for instance choose to work at night and sleep during the day. This places great demands on how we approach future light solutions, and the possibilities for innovation when developing a lighting product.







FOCUS+

Art. name	Focus +1	Focus +2	Focus +3	Focus +4
Art. no. white	261604	261610	261616	261622
Art no. black	261605	261611	261617	261622
EAN white	5711389396046	5711389616106	5711389616168	5711389616229
EAN black	5711389341053	5711389616113	5711389616175	5711389616236
RAL white	9003	9003	9003	9003
RAL black	9005	9005	9005	9005
Material	Alumunium/Glass	Alumunium/Glass	Alumunium/Glass	Alumunium/Glass



ENERGY LABEL

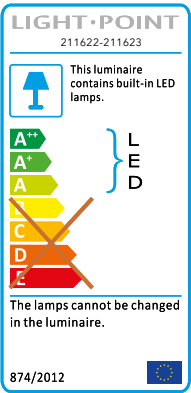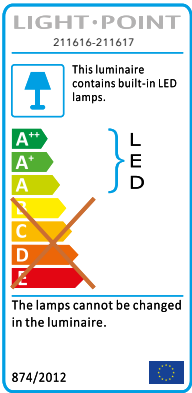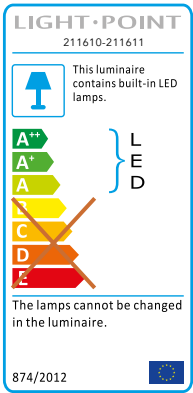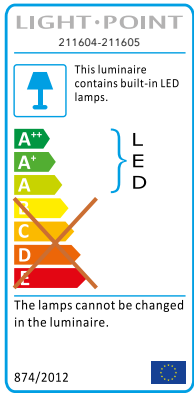

DIMMING



Art. name	Focus +1	Focus +2	Focus +3	Focu +4
Light source	Lumens	Lumens	Lumens	Lumens
Lifetime	50.000	50.000	50.000	50.000
Number of light	1	1	1	1
Electronic gear	N/A	N/A	N/A	N/A
Driver watt	N/A	N/A	N/A	N/A
Light source watt	10	10	10	10
System watt	10	20	30	40
Voltage	220-240	220-240	220-240	220-240
Dimmable	Yes	Yes	Yes	Yes
Lumen output	900	1800	2700	3600
Lumen pr. watt	90	90	90	90
Flux	888	1776	2664	3552
CCT (K)	3000	3000	3000	3000
RA/CRI	≥ 90	≥ 90	≥ 90	≥ 90
Mac Adam	3	3	3	3
Light Distribution	Direct	Direct	Direct	Direct
Beaming angle	20	20	20	20
Tilt angle	90	90	90	90
Cut out mm.	N/A	N/A	N/A	N/A
Rotation	360	360	360	360
Looping	Yes	Yes	Yes	Yes

INSTALLATION GUIDE



INSTALLATION INSTRUCTION

- Before installing, make sure the power supply is switched off.
- Follow the steps as the figure for installation or replacement of bulb Step.
 - after holing, pull out the wires.
 - fix the mounting bracket onto the wall with screws.
 - connect the wires to the terminal block.
 - slide the fixture to the mounting bracket
- After finishing every step, tighten the screws, have the fixture fixed, and then connect the power supply.

CLEANING INSTRUCTION

- Before cleaning, ensure that the power supply is switched off.
- Use only a soft cloth to clean the lamp, dampened with mild cleanser if needed for resistant dirt.
- Warning: do not use alcohol or other solvents.

CAUTION:

In case of any doubt, please contact the qualified electrician.

MOUNTING

