









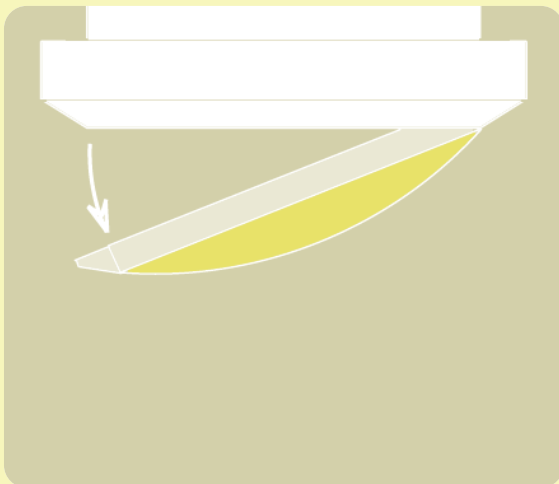


ceiling/wall/outdoor









							
$3''$ 8 cm	$4''$ 10 cm	$4.7''$ 12 cm	$6.3''$ 16 cm	$6.7''$ 17 cm	$10.6''$ 27 cm	$15''$ 38 cm	$22''$ 56 cm
D20/17p D20/17pw	D20/17v	D20/27p D20/27pw	D20/27v	D20/38p D20/38pw	D20/38v	D20/56p D20/56pw	D20/56v
weight 1.59 lb	weight 1.80 lb	weight 3.28 lb	weight 4.32 lb	weight 5.64 lb	weight 7.56 lb	weight 14.40 lb	weight 19.18 lb








D20/17			
D20/17.1	 (†)	D20/17.2	
	40W G16 ^{1/2} candelabra base		9W CFQ G23-2
D20/17.3	 (†)		
	60W T4 halogen G9 bi-pin		







D20/27			
D20/27.1	 (†)	D20/27.4 EL	
	100W A-19 soft white med. base		2x18W CFQ G24q-2 120-277V- electronic ballast
 (†)		D20/27.5	
75W T-10 halogen med. base			2x13W CFQ GX23-2
			
	15W CFEL med. base		



the diffuser closure system, of the "watchcase" type, facilitates bulb replacement and cleaning of the reflectors

D20/38			
<p>D20/38.1</p>  (†) <p>150W A-21 med. base</p>  (†) <p>100W T-10 halogen med. base</p>  <p>23W CFEL med. base</p>	<p>D20/38.2</p>  (†) <p>2x60W A-19 med. base</p>  <p>2x23W CFEL med. base</p>	<p>D20/38.4</p>  <p>2x26W CFQ G24d-3</p> <p>D20/38.4 C</p>  <p>2x26W CFQ G24d-3 277V~</p>	<p>D20/38.4 EL</p>  <p>2x26W CFQ G24q-3 120-277V- electronic ballast</p>

D20/56			
<p>D20/56.1</p>  (†) <p>3x100W A-19 med. base</p>  (†) <p>3x100W T-10 halogen med. base</p>  <p>3x23W CFEL med. base</p>	<p>D20/56.3</p>  <p>3x26W CFQ G24d-3</p> <p>D20/56.3 C</p>  <p>3x26W CFQ G24d-3 277V~</p>	<p>D20/56.6 EL</p>  <p>22W+40W FSC 2GX13 120-277V- electronic ballast</p>	<p>D20/56.7 EL</p>  <p>4x26W CFQ G24q-3 120-277V- electronic ballast</p>

materials			
die-cast aluminium body moulded glass (v) or polycarbonate (p) diffusor			
structure finishes			
			
polished	painted alu	white	
diffusor finishes			
			
glass	polycarbonate		
			<p>"P" version is suitable for damp locations</p> <p>"P" version with fluo optics and "PW" version are suitable for wet locations</p>
			

(†) Note: only with glass diffusor (v)