

# dioscuri parete, soffitto 14, 25, 35, 42

design: michele de lucchi - 1999, 2003, 2005



92

Supporto parete-soffitto in resina termoplastica, diffusore in vetro soffiato opalino acidato. Disponibile in quattro dimensioni. Emissione di luce diffusa. Colore: bianco.


Wall ceiling-support in thermoplastic resin, diffuser in opal-blown glass acid-etched. Available in four dimensions. Diffused light emission. Colour: white.

Support applique-plafonnier en résine thermoplastique, diffuseur en verre soufflé opalin traité à l'acide. Disponible en quatre tailles. Emission lumineuse diffuse. Couleur: blanc.

Sockel der Wand- und Deckenleuchte aus thermoplastischem Kunstharz, Schirm aus mundgeblasenem geätztem Opalglas. Erhältlich in vier Größen. Diffuse Lichtverteilung. Farbe: Weiß.

Soporte de aplique o plafón, de resina termoplástica. Difusor, de cristal soplado opalino al ácido. Está disponible en cuatro tamaños. Emisión de luz difusa. Color: blanco.


**A** *Design Innovationen Roter Punkt für hohe Designqualität 2000 - Essen (Deutschland)*  
*Design Plus Light+Building 2000 - Frankfurt am Main (Deutschland)*



## dioscuri parete, soffitto 14

max 60W (G 9) - QT 14 included


IP 65



## dioscuri parete, soffitto 25

max 100W (E 27) globe ø cm 9,5 - G 95 or   
20W (E 27) - TC-TSE

IP 65

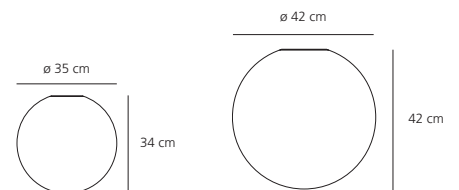

## dioscuri parete, soffitto 35, 42

max 100W (E 27) softone - A 60 or   
max 150W (E 27) globe ø cm 9,5 - G 95 or   
23W (E 27) - TC-TSE

IP 65

