## **Product Information Sheet**


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources						
Supplier's name or trade mark: Menu A/S						
Supplier's address: PD, Aarhusgade 130, 2150 Nordhavn -, DK						
Model identifie	er: 4863639					
Type of light so	urce:					
Lighting techno	logy used:	LED	Non-directional or directional:	DLS		
Light source cap-type (or other electric interface)		PCB Board				
Mains or non-mains:		NMLS	Connected light source (CLS):	No		
Colour-tuneabl	e light source:	No	Envelope:	-		
High luminance	light source:	No				
Anti-glare shield:		Yes	Dimmable:	Yes		
Product parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		3	Energy efficiency class	G		
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		250 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700		
On-mode power (P <sub>on</sub> ), expressed in W		2,5	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the second decimal	0,00		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81		
Outer	Height	6	Spectral power	See image		
dimensions without	Width	50	distribution in the	in last page		
without	Depth	50				

separate control gear, lighting control parts and non- lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load				
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-			
		Chromaticity	0,450			
		coordinates (x and y)	0,400			
Parameters for directional light sources:						
Peak luminous intensity (cd)	240	Beam angle in degrees, or the range of beam angles that can be set	90			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	0	Survival factor	0,00			
the lumen maintenance factor	0,85					

(a)'-': not applicable; (b)'-': not applicable;

## Spectrum Test Report

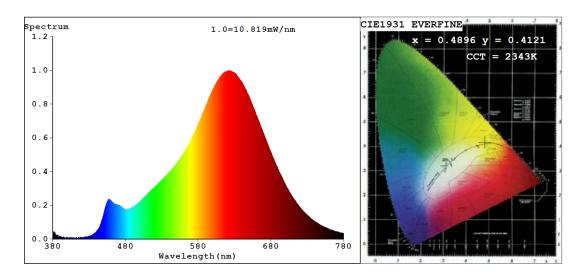

## Color Parameters:

Chromaticity Coordinate: x=0.4896 y=0.4121/u'=0.2812 v'=0.5324