



wall

	
D52	
 60W HSGST E14	 60W IBP E14
D52 f	D52 f EL
 26W FSQ G24 d-3	 18W FSQ G24 q-2

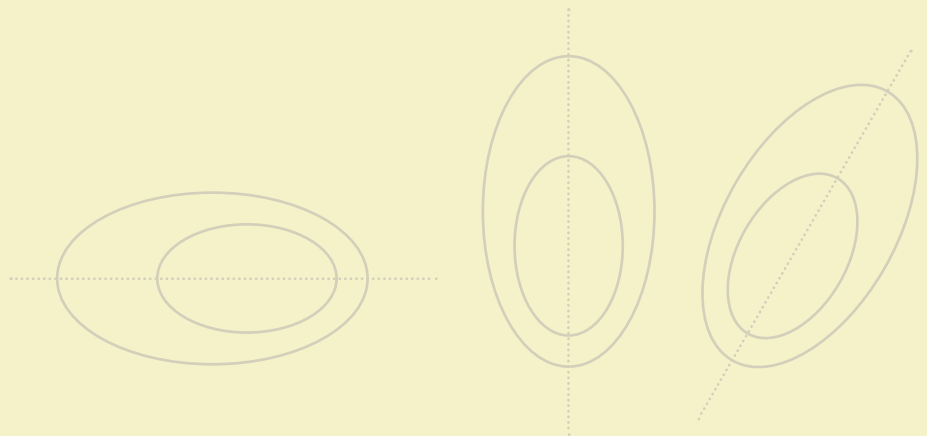

through use of in-mould decoration the iridescent film for colour changes is not simply applied to the diffuser but is an integral part of it

materials

injection-moulded polycarbonate

structure finishes

opaline

elliptical film



iridescent

IP40

