


outdoor

**D63a.fluo****D63a.hqi****D63a.led**

4LED 1,2W
High
Efficiency

**D63t2.fluo****D63t2.hqi****D63t2.led**

4LED 1,2W
High
Efficiency

D63t2.sol

8 LED
High
Efficiency

**D63t1.fluo****D63t1.led**

4LED 1,2W
High
Efficiency

D63t1.sol

4LED
High
Efficiency



dimensions

height 16 cm, width 20 cm
total height 28 and 70 cm (with vertical supports)

lamps

20W MT, 26W fluorescent, white light LED
photovoltaic cells

materials

body and cover in die cast aluminium
polycarbonate diffuser

structure finishes

painted white, alu or chestnut


IP65



photometric data


D63.fluo

Flux: 1800.00
Maximum 79.10

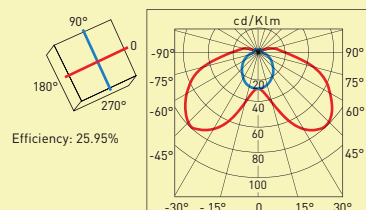


D63.hqi

Flux: 1410.00
Maximum 139.40

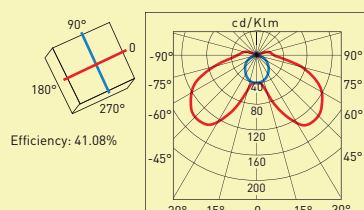



D63.led

Flux: 190.00
Maximum 79.79

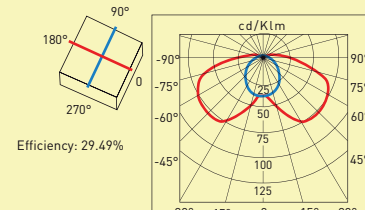

D63.sol


Flux: 20.00
Maximum 412.77

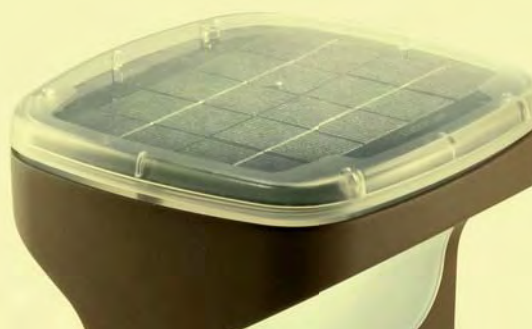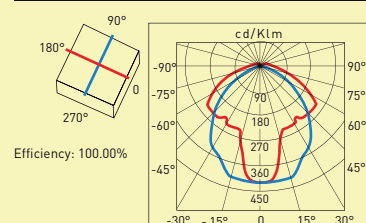

Estate (Giugno)
Summer (June)
Sommer (Juni)
Été (Juin)
Verano (Junio)

Latitudine
Latitude
Latitude
Latitude
Latitude

Inverno (Dicembre)
Winter (December)
Winter (Dezember)
Hiver (Décembre)
Invierno (Diciembre)

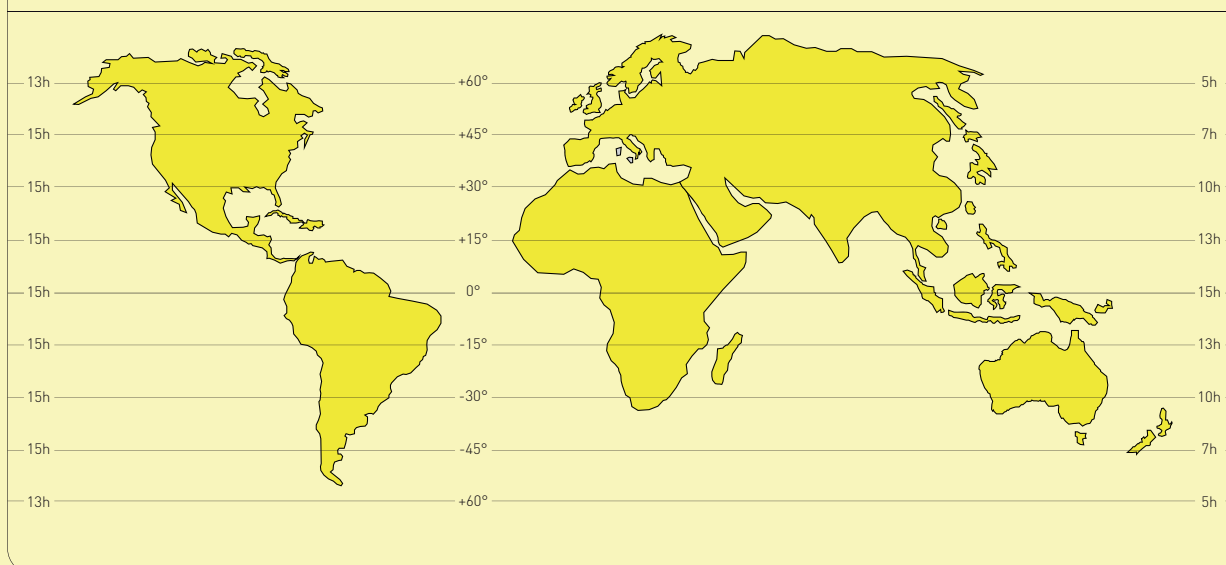

Hours of operation with LEDs illuminated at maximum output, after a day of exposure in full sun.

Values shown may vary according to the position of the product, to the weather conditions and to the battery's efficiency status.

Operating temperature: -10°C ÷ +50°C.

Operating humidity: 0% ÷ 100%.