

Trick

january 2017



Trick

code
BU23

Technical description

Wall and ceiling-mounted luminaire, complete with ballast and designed for use with LED lamps and a patented 360° radial effect optic. The product consists of a support base and screen. The base is made of phosphocromatization treated, die-cast aluminium, with a double base coat and passivation at 120°C. It is coated with liquid acrylic paint, cured at 150 °C to guarantee a high level of weather and UV ray resistance. The screen is made of methacrylate. All the screws used are made of A2 stainless steel.

Installation

Wall and ceiling mounted by means of a stainless steel wall fixture plate.

Size (mm)
ø160x85

Colour
White (01) | White/Chrome (E4) | White/Grey (E5)

Weight (kg)
1.15

Mounting
wall surface | ceiling surface

Wiring info
Product supplied with an outlet cable L=200mm. Equipped with electronic ballast.

Notes
The chrome-coloured version of Trick (10) can only be used internally.

Complies with EN60598-1 and pertinent regulations



Product configuration: BU23+LED
LED: LED WARM


Product characteristics

Total lighting output [Lm]: 448	Total luminous flux at or above an angle of 90° [Lm]: 212,7
Total power [W]: 13,6	Emergency luminous flux [Lm]: /
Luminous efficacy (lm/W, real value): 32,9	Voltage [V]: -
Life Time: 50.000h - L80 - B10 (Ta 25°C)	Number of optical assemblies: 1

Optical assembly Characteristics 1

Light Output Ratio (L.O.R.) [%]: 32	Number of lamps for optical assembly: 1
Lamp code: LED	Socket: /
ZVEI Code: LED	Ballast losses [W]: 2,6
Nominal power [W]: 11	Colour temperature [K]: 3000
Nominal luminous [Lm]: 1400	CRI: 80
Lamp maximum intensity [cd]: /	Wavelength [nm]: /
Beam angle [°]: /	MacAdam Step: <3

Polar

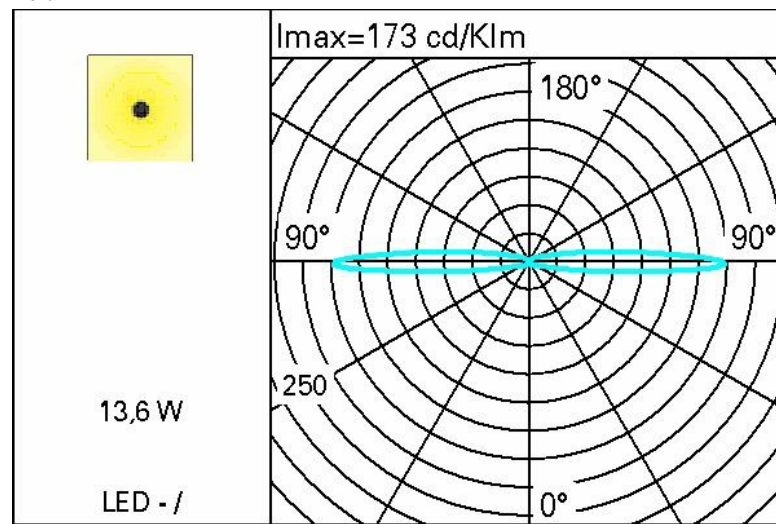

Isolux

