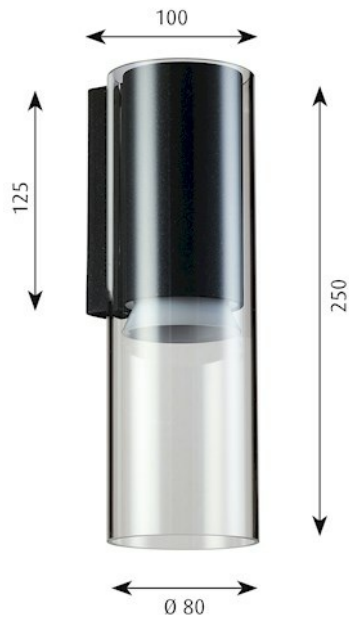


---

## F+P WALL

---

**Design:**

Foster & Partners

**Concept:**

The fixture emits a symmetrical downlight. The opal cone ensures an even and diffuse light, free from obtrusive glare. The light emitted through the cone helps reducing the contrasts. The polished edges of the cylinder glow and hence clarify the shape of the fixture.

**Finish:**

White with textured surface, aluminium coloured with textured surface or graphite with textured surface, powder coated.

**Material:**

Die cast aluminium, Enclosure: Extruded clear acrylic with polished edges.

**Mounting:****Weight:**

Min: 1.2 kg Max: 1.3 kg

**Class:**

Ingress protection IP44 (LED unit: IP65). Electric shock protection I w/o ground.

**Info notes:**

The wall plate as an accessory is only needed for covering a junction box in the wall. For LED replacement kit please do contact Louis Poulsen. The innovation of the LED technology is constant. The specifications mentioned are based on present technology. Please find updated info on products on our website [www.louis Poulsen.com](http://www.louis Poulsen.com).

**Specification notes:**

The LED driver is integrated in the fixture. All LED efficiency information are measured as system power.

Connector: 3x2,5mm2. Cable entry: 1x rear entry  
for max Ø 10-14,5mm cable.

Results (3)



CCT/WATT/ LUMEN	LIGHT SOURCE	FINISH	INSULATION CLASS	EFFICACY	ORDER-NO.	
3000K 8.1 352	8WLED 3000K	ALU COL TEXT	I	43	5743162006	>
3000K 8.1 352	8WLED 3000K	GRAPH TEXT	I	43	5743162019	>
3000K 8.1 352	8WLED 3000K	WHT TEXT	I	43	5743162022	>

---

# ACCESSORIES

---

PRODUCT NAME:	ORDERING NUMBER:
F+P WALL, WALL PLATE ALUC	5743168330
F+P WALL, WALL PLATE GRAPH	5743168343
F+P WALL, WALL PLATE WHT	5743168356